

TECHNICAL SPECIFICATIONS



Engine

Engine Model	ISUZU AA-6HK1XQP
Number of Cylinders	6
Max. Torque/Speed	872.8N·m/1700rpm
Displacement	7.79L



Hydraulic system

Max. Main Pump Flow	560L/min
Main Safety Valve Pressure	34.3MPa



Main Performance

Bucket Digging Force	223kN
Arm Digging Force	170kN
Max. Traction Force	290kN
Max. Walking Speed	5.5km/h
Min. Walking Speed	3.3km/h
Rotary Speed	9.2r/min
Gradeability	35°
Ground Pressure	67kPa



Oil Capacity

Fuel Tank	630L
Hydraulic Tank	340L
Engine Oil	38L



LOVOL CONSTRUCTION MACHINERY GROUP CO., LTD.

SHOW ROOM TOGUN MOTORS

ADRESSE: Faladi sur la route de snou en face de l'onap

BP : E1218 - Bamako, Mali TEL. : +223 44 97 93 93

EMAIL : togunamotors@groupepetoguna.com

As manufacturer, LOVOL has right to constantly upgrade and improve our products without informing to customers.
The pictures in literatures are for reference only, the detailed specifications are subject to real products.



Rated Power 190.5kW/2000rpm
Operating Weight 33600kg
Bucket Capacity 1.5m³

FR330D
EXCAVATOR



EFFICIENCY

Powerful Engine


Equipped with original ISUZU engine imported from Japan which can provide strong power when working with low fuel consumption, the fuel efficiency is improved dramatically.

Hydraulic System

Kawasaki hydraulic components are adopted, combining with LOVOL Japan Engineering Center's optimal adjustment, the whole hydraulic system delivers smoothness, coordination and fast response features when working. Kawasaki intelligent control system also can make great match between engine and main pump which could improve working efficiency significantly.

Electronic Control System

The new electronic control system is adopted in order to improve the calculation speed to achieve precise operation. Automatic idle function can reduce fuel consumption and noise dramatically.

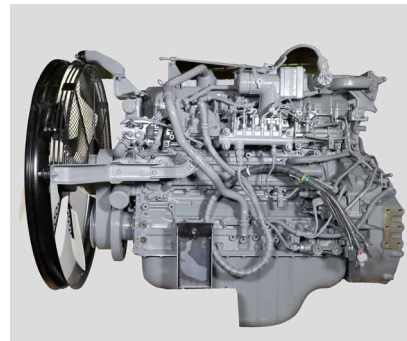

RELIABILITY

Reinforced Structures

The advanced stress analysis technology and Q345 materials make whole structures more reliable. The front and rear support of boom are made of cast steel which effectively reduces concentration of stress, key positions are also reinforced by welding strength plate, which makes arm more robust.

Reliable Electrical System


All the wiring harnesses adopt waterproof and dustproof connectors, which have high security level and high reliability. Shut-down protection is added to reduce the failure possibility for electrical elements when power was cut off.

Reinforced Working Device

Adopts high-strength rock bucket teeth which is special suitable for the tough applications, the boom and arm are reinforced to prolong the service life. Self-lubrication shaft sleeve is used to make every linkage works smoothly with high durability.



COMFORT

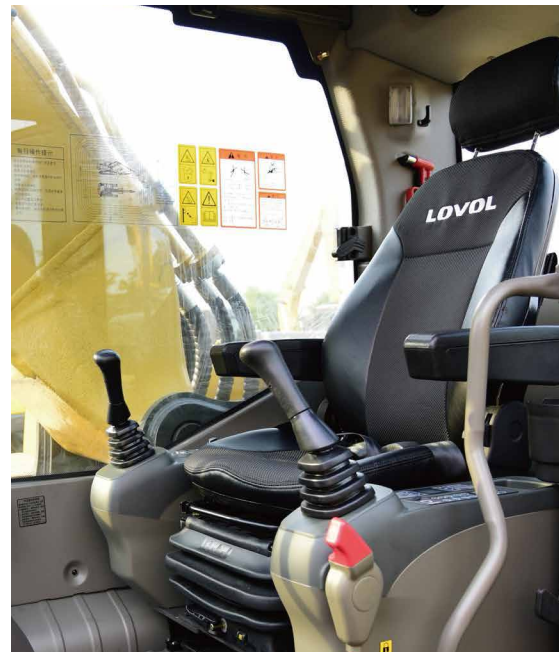

Large Spacious Cab

Equipped with spacious cab which provides operator large space to operate machine. The premium suspension seat with armrests is very comfortable and it can reduce the working fatigue dramatically. Front windshield can be partially or fully retracted to the cab roof. Rearview camera is optional to get better rear vision in order to improve operation safety in jobsite.


Ergonomic Design

The proportional joystick delivers sensitivity, accuracy and smoothness in operation. This joystick is specially designed to meet different operating conditions. Intelligent control system is standard which could control diverse attachments such as bucket, hammer, scarifier and hydraulic scissors.

Low Noise and Low Vibration

In order to reduce work fatigue and improve productivity, the noise inside of cab has been controlled to the lowest level. The cab is attached to the frame with buffer that dampens vibrations and sound levels to enhance operator comfort.

SERVICEABILITY

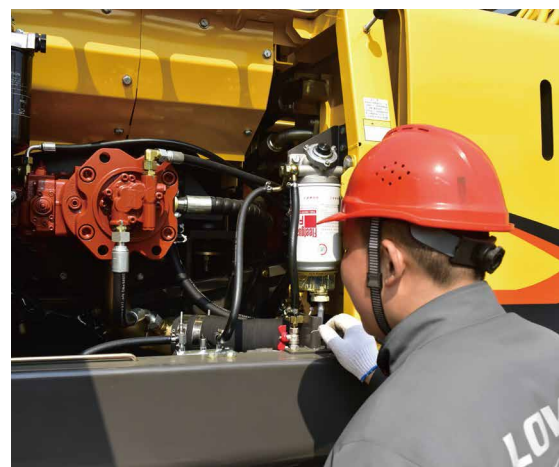

Display Screen

Add trouble code diagnostic and maintenance monitor functions which are convenient for operator to find the failure and do the routine maintenance on time.

Engine Hood and Panels

The large engine hood enlarges maintenance space for operator to check and maintain the engine. The tool box is big with big opening angle which can put grease bucket and special tools easily. One key can open all locks of machine, it is very convenient for the operator.

Filters and Maintenance Period


All the filters are fixed at ground level position, it is very convenient to do routine maintenance. The maintenance interval is also extended to save time and cost.



INCREASE YOUR PRODUCTIVITY AND PROFIT WITH LOVOL ATTACHMENTS

You can easily expand the performance of your machine by utilizing any of the variety of LOVOL Attachments.

Each LOVOL Attachments is designed to fit the weight and horsepower of LOVOL Excavator for improved performance, safety, and stability.

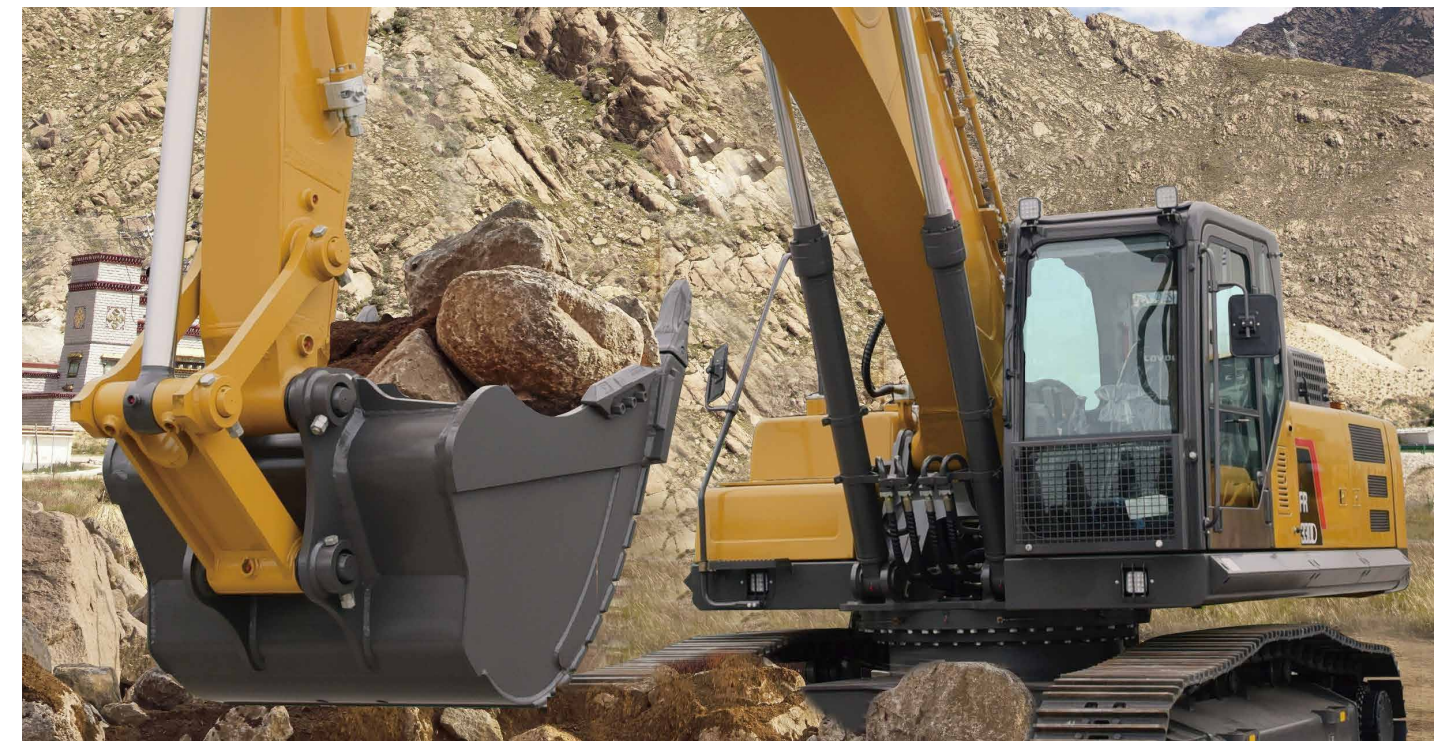

Hydraulic Shear



Hydraulic Hammer



Standard Bucket



STANDARD CONFIGURATION

Engine

Turbocharged 6-cylinders water-cooling direct injection type
Complying with China Stage II emissions
Automatic idle system
Engine oil pan drain valve
Radiator with protective net
Double filter element
Air pre-filter
Air intake heater
Fan guard

Hydraulic System

Automatic hydraulic system (confluence system)
Anti-swing valve
Movable arm and bucket rod block valve
Multi-stage filtration system
Cylinder buffer device
Pilot buffer valve (rotary, bucket rod, movable arm)
Slope anti-rotation device
Waste oil discharge pipeline

Electronic Control System

24V power supply
Diagnostic interface
Emergency stop switch
Display brightness adjustment
Maintenance tips
Automatic diagnostic system
Automatic idle system
One-touch pressure augmentation
Safe stop / start function
Main power switch
Anti-theft system
Engine starting protection
Multi-language function of monitor
Top light of cab

Cab

Cigar lighter
Seat belt
Front sunshade
Console box
Escape hammer
Air conditioner
Audio device
Three-stage shock absorber (silicone oil, rubber pad and spring)
Flexible antenna
Suspension seat
Radio (with interfaces of MP3 and USB)
Hydraulic safety lock
Sun-protection safety glass
Floor mat
Large storage area
Pull-up front window
Removable lower windshield
Sunshade window
Wipers
Open skylight


Swing Platform

Passage with railing
Tool box
Anti-skid plate
Large pedal
Large armrest
Bottom protection plate
Anti-collision beam
Tools
Spares parts

Chassis

Fixed chassis
600mm,wide three-tooth track shoe

TECHNICAL SPECIFICATIONS

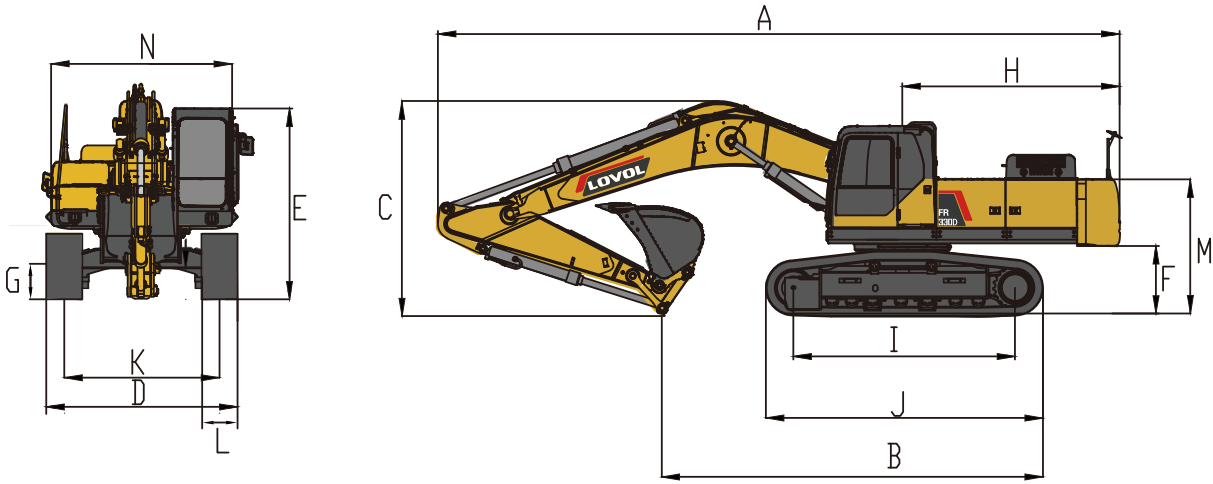

Working Range

Max. Digging Height	1	10120mm
Max. Dumping Height	2	7400mm
Max. Digging Depth	3	7330mm
Max. Vertical Digging Depth	4	6365mm
Max. Digging Radius	5	11075mm
Max. Ground Digging Radius	6	10880mm
Min. Turning Radius	7	4320mm

Dimensions

Shipping Length	A	11234mm
Shipping Ground Length	B	5908mm
Boom Height	C	3290mm
Shipping Width	D	3205mm
Cab Height	E	3343mm
Ground Clearance of Counter Weight	F	1205mm
Min. Ground Clearance	G	520mm
Tail Turning Radius	H	3560mm
Length to Center of Rollers	I	3700mm
Track Length	J	4630mm
Track Gauge	K	2590mm
Track Shoe Width	L	600mm
Hood Height	M	2300mm
Rotary Platform Width	N	3205mm

Other Specifications

Boom Length	6470mm
Arm Length	3190mm
Track Section Number (each side)	45
Track Roller Number	7