

160 HP

SD16L

Extra power to master swamps

- ▶ Engine model: Shangchai SC11CB184G2B1/Weichai WD10G178E25
- ▶ Net power: 120 kW/160HP/1850 rpm
- ▶ Operating weight: 18.4 t



TOGUNA Motors

Product features

The SD16L Extra-Swamp bulldozer was developed to meet the requirements for operation in wetlands. The SD16L is equipped with a hydraulic drive system with hydraulic control technology and an advanced structure, providing reliable performance and convenient and flexible operation, making the SD16L the ideal construction machine for muddy or wet environments.



SHANTUI
VALUE THAT WORKS

SHOW ROOM TOGUNA MOTORS

ADRESSE: Faladiè sur la route de sénou en face de l'onap

BP : E1218 - Bamako, Mali

TÉL. : +223 44 97 93 93

EMAIL : togunamotors@groupetoguna.com

160 HP



SD16L

Technical specifications:

Blade Type	Straight-tilt blade
Minimum ground clearance:	495 mm
Ground pressure:	0.027 MPa
Minimum turning radius:	4.6 m
Gradeability:	30°
Track gauge:	2300 mm

	ENGINE	Model & type	Shangchai SC11CB184G2B1/Weichai WD10G178E25; 4-cycle, in-line, water-cooled, direct injection		
		Horsepower	Gross power: 131/175/1850 kW/HP/rpm // Net power: 120/160/1850 kW/HP/rpm		
		Number of cylinders	6-126 x 130 mm (bore x stroke)		
		Piston displacement	9.726 L		
		Min. fuel consumption	214 g/kW-h		
		Maximum torque	765 N·m@1300 rpm		
	POWER TRANSMISSION SYSTEM	Torque converter	3-element, 1 stage, 1 phase		
		Transmission	Planetary gear type, power-shift, forced lubrication		
		Main drive	Spiral bevel gear, single-stage speed reduction, splash lubrication		
		Steering clutch	Wet, multi-disc, spring loaded, hand hydraulically separated, inter-linking with steering brake		
		Steering brake	Wet, floating band structure, foot brake with hydraulic booster		
		Final drive	Tow-stage reduction of spur gear splash lubrication		
	TRAVEL SPEED	Gear	1st	2nd	3rd
		Forward	0~3.29 km/h	0~5.82 km/h	0~9.63 km/h
		Reverse	0~4.28 km/h	0~7.59 km/h	0~12.53 km/h
	UNDERCARRIAGE SYSTEM	Type	Sprayed beam, suspended structure of equalizer		
		Carrier rollers	2 each side		
		Track rollers	7 each side		
		Track type	Assembled, cycloidal triangle		
		Width of track shoes	1100/950 mm		
		Pitch	203.2 mm		
	HYDRAULIC SYSTEM	Maximum pressure	14 MPa		
		Pump type	Gear pump		
		Discharge	243 L/min		
		Bore of working cylinder × no.	110 mm × 2		
	Blade (OPTIONAL)	Blade type	Straight-tilt		
		Dozing capacity	3.8 m³		
		Efficiency (Theoretical value 40 m)	220 m³/h		
		Blade width	4150 mm		
		Blade height	960 mm		
		Maximum drop below ground	485 mm		
		Lifting height of blade	1005 mm		

OVERALL DIMENSIONS Straight-tilt blade

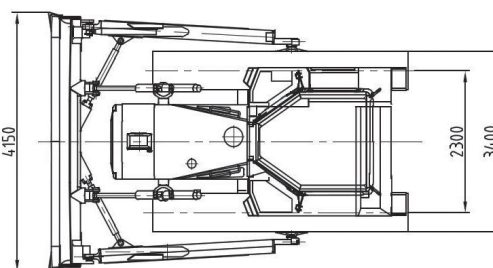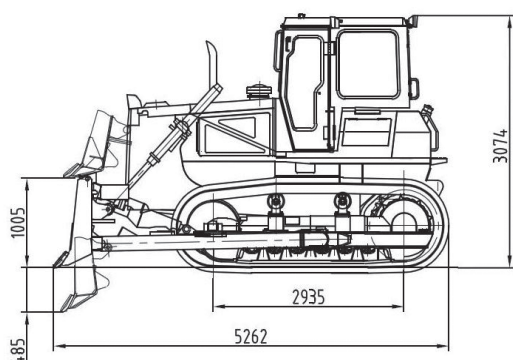

▶ THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.