

SR26MR-3

SHANTUI
VALUE THAT WORKS

COMPACTOR
SERIES

ENGINE MODEL	WEICHAI WP10G240
GROSS POWER	178kW @ 2200rpm
OPERATING WEIGHT	26000kg



TOGUNA Motors

LET'S MAKE
CONSTRUCTION EASIER



SHOW ROOM TOGUNA MOTORS

ADRESSE: Faladiè sur la route de sénou en face de l'onap

BP : E1218 - Bamako, Mali

TÉL. : +223 44 97 93 93

EMAIL : togunamotors@groupepetoguna.com



www.shantui.com

SR26MR-3 TECHNICAL PARAMETERS

COMPACTOR SERIES



SHANTUI
VALUE THAT WORKS

TOGUNA Motors

ENGINE

Model	Weichai WP10G240
Number of Cylinders	6
Type	4-cycle, Electronic Injection, Water-cooled
Aspiration	Turbocharged
Bore x Stroke	126*130mm
Displacement	9.726L
Gross Power	178kW @ 2200rpm
Max. Torque	1100N.m
Rated Fuel Consumption	212g/kW.h
Air Cleaner	2-stage, Dry Type

POWER TRAIN

Type		Mechanical, All-wheel Drive	
Axle		Dry Type	
Transmission		Electro-hydraulic Control, Power Shift Transmission	
	Front Pad-drum	Width	1000mm
		Diameter	1636mm
		Number of Teeth	24
		Height of Teeth	168mm
	Rear Pad-drum	Width	1000mm
		Diameter	1636mm
		Number of Teeth	24
		Height of Teeth	168mm
Max. Grade Ability		100%	

STEERING

Type	Hydraulic Power, Articulated Steering
Front Wheel Steering Angle	±36°
Articulation Angle	±8°
Min. Turning Radius (Outside)	7250mm
Min. Turning Radius (Inside)	3590mm

BRAKES

Service Brake	Air over Hydraulic Disc Brake, Foot Actuated
Parking Brake	Drum Type, Manually Actuated

DOZER BLADE

Width	3660mm
Height	1800mm
Capacity	12m³
Max. Lifting Height	1150mm
Max. Cutting Depth	165mm

SPEED

Forward, I, II, III	4.82\7.66\11.6km/h
Reverse, I, II	4.82\7.66km/h

CAPACITIES



Fuel Tank	440L
Hydraulic Oil Tank	130L
Disinfectant Tank	146L
Engine Coolant	60L

ELECTRICAL SYSTEM

Battery	2 x12V,105Ah
Alternator	28V,70A
Starter Motor	24V,7.5kW

WEIGHT

Operating Weight	26000kg
Axle Load, Front Wheel	13000kg
Axle Load, Rear Wheel	13000kg

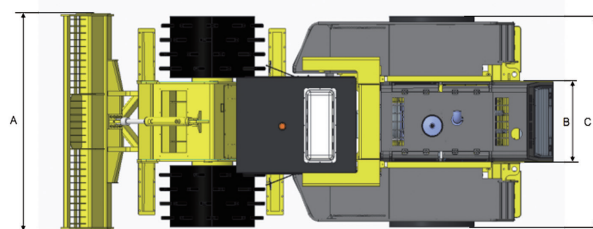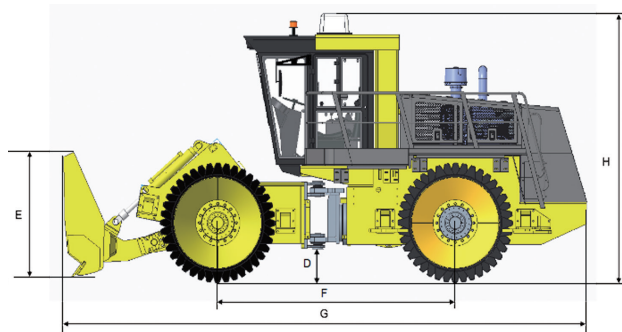

DIMENSIONS

A	3660mm
B	1290mm
C	3360mm
D	435mm
E	1800mm
F	3500mm
G	7940mm
H	3925mm